

Features:

- The SLL Lighting Guide 2 for Lighting for hospitals and health care buildings states: It is advisable in operating theatres to use luminaires that have glass diffusers since the close cell structure of glass cannot be penetrated by bacteria and is unaffected by sterilising materials and ultraviolet light.
- Clean room and operating theatres
- Recessed lay in ceiling mounting (only 76 void depth required)
- Designed for narrow/wide (15/25mm) 'T' grid systems
- Two versions available:
 - Single microprismatic lens
 - Dual microprismatic lens & toughened glass
- Four sizes available
- IP65 (dust tight & water jet proof) on front face only and IP54 (limited ingress) from the rear
- High performance energy efficiency surface-mount-device (SMD) LEDs
- Available in 4000K (cool white)
- CRI 95
- Unique lever release system for ease of maintenance
- Average 60,000 hrs LED life - L80 B10

Options:

- 3hr maintained emergency
- Dimming versions available:
 - DALI (digital)

Accessories:

- Plasterboard ceiling kit

Material:


- Body: steel
- Lens single: polycarbonate
- Lens dual: PMMA / glass

Finish:



- Body: powder coated

Colour:


01 White

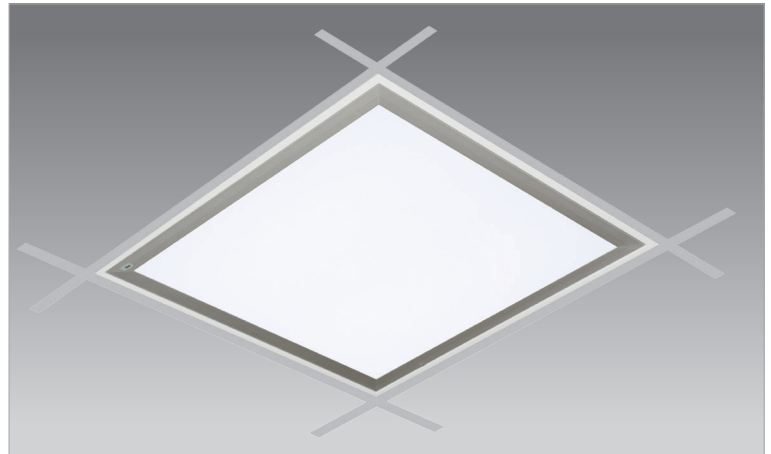


Detail & Technical

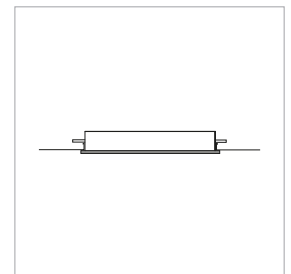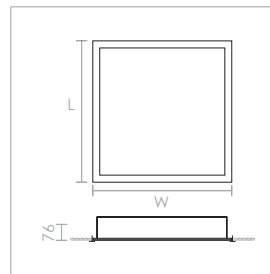

Photometrics

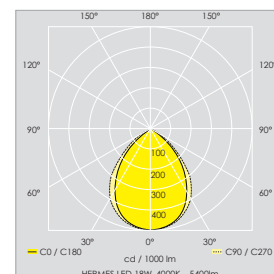

Single Lens

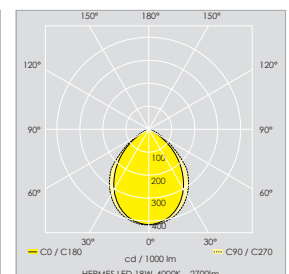

Dual Single



RECESSED MODULARS



Hermes		Delivered Lumens	Luminus Efficacy	Ordering Codes		Dimensions (mm)	
	Colour Temperature			Microprism (Single)	Microprism/ Glass (Dual)	Length	Width
18W LED	4000K	2700lm	150lm/W	45-201-161-401	45-201-162-401	596	296
36W LED	4000K	5400lm	150lm/W	45-201-361-401	45-201-362-401	596	596
54W LED	4000K	7500lm	139lm/W	45-202-361-401	45-202-362-401	596	596
36W LED	4000K	5400lm	150lm/W	45-201-261-401	45-201-262-401	1196	296
71W LED	4000K	10800lm	152lm/W	45-201-461-401	45-201-462-401	1196	596
Options		Add to Ordering Code		Accessories		Ordering Code	
Emergency (3 hour) 		E3-		Plasterboard ceiling kit		A45-01-03-02	
DALI (digital) dimming		/DD					