

Features:

- Wall or ceiling mounting
- IP54
- IK09 (10 joule) shock resistance
- High performance energy efficient Osram surface-mount-device (SMD) LEDs
- Available in 4000K (cool white)
- Average 50,000 hrs LED life - L70 B10
- BESA box provision
- 2x 20mm conduit entry for side wiring
- Removable gear tray

Options:

- Integral 3hr maintained emergency
- Integrated Manual Intelligent Control (MIC®) - not recommended for exterior use
- PRO ECO (wireless testing & control system) available - on special request
- Integral photocell
- Tamper resistant Torx screws
- 3000K (warm white) LED colour temperature available - on special request

Material:


- Body: polycarbonate
- Lens: polycarbonate

Finish:


- Lens: cloud (standard) or prismatic (on special request)

Colour:


- 01 White
- 02 Black

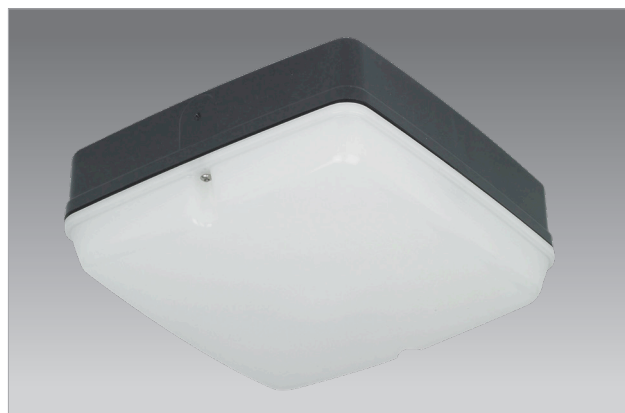

Technical

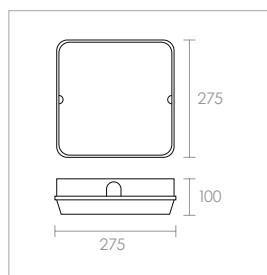

Photometrics

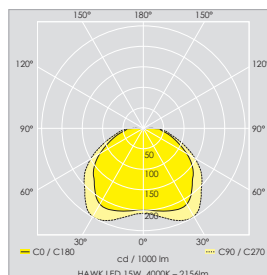

Hawk				Ordering Code	
Wattage	Colour Temperature	Delivered Lumens	Luminous Efficacy	White	Black
15W LED	4000K	2156lm	144lm/W	65-111-061-401	65-111-061-402
19W LED	4000K	2928lm	154lm/W	65-112-061-401	65-112-061-402
28W LED	4000K	3950lm	141lm/W	65-113-061-401	65-113-061-402

Options	Add to Ordering Code
Emergency (3 hour) excludes 28W version	E3-
MIC 1	/MIC1
MIC 2	/MIC2
MIC 3	/MIC3
Integral photocell	/P
Torx screws	/TS

